


Product data sheet

Rotary switch (insert), 3-level switch with OFF position

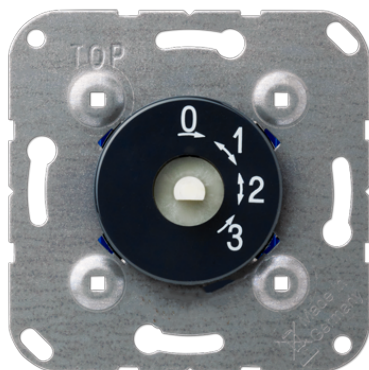

Reference number

1101-4

Rotary switch 16 AX / 250 V ~ (insert)

with screw terminals for rigid and flexible wires up to 2.5 mm²

screw fixing only, without claws

not suitable for installation in surface caps

Installation note: No plaster compensation possible. Insert must be mounted flush with the wall. Supporting frame must be on top of wallpaper.

Spare scale disc

for ref.-no. 1101-4: SKS 1101-4

Centre plates:

AS / A ranges: ref.-no. .. 1541 ..

CD range: ref.-no. CD 1541 ..

LS range: ref.-no. LS 1941 .., .. 1941 ..

Notice!

Installation only by persons with relevant electrical knowledge and experience!*)

Use only with original JUNG product components approved for this article.

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

Please contact a skilled electrician!

*) Required technical knowledge for installation:

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

Scale disc anthracite

Version:

3-level switch with OFF position

Switching current::

16 AX