


Product data sheet

Key switch (insert), blind push-button 1-pole

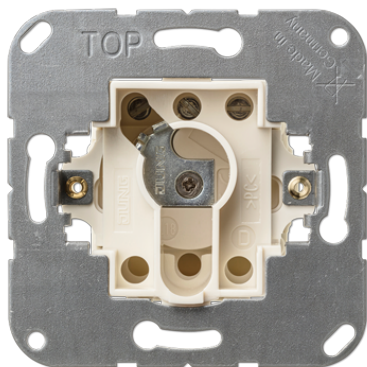

Reference number

134.15

Blind key switch (insert) without protection against dismounting

10 A 250 V~

with screw terminals for rigid and flexible wires up to 2.5 mm²

screw fixing only, without claws

for profile half cylinder with total length of approx. 40 mm, e.g. ref.-no.: 28, 28 G1

not suitable for installation in surface caps

Installation depth: min. 55 mm

Cover is flush with the cylinder

A pre-travel prevents a quick change of direction.

Profile half cylinder (acc. to DIN 18252) for key switches

with 3 keys

different locks: ref.-no. 28

equal locks: ref.-no. 28 G1

Spare key

for 28 G1: ref.-no. 28 G1 SL

Centre plates:

AS / A ranges: ref.-no. A 525 PL ..

CD range: ref.-no. CD 525 ..

LS range: ref.-no. LS 925 .., .. 2925 ..

Version:

Push-button, 1-pole (1 motor)