


Product data sheet

Potential equalisation socket

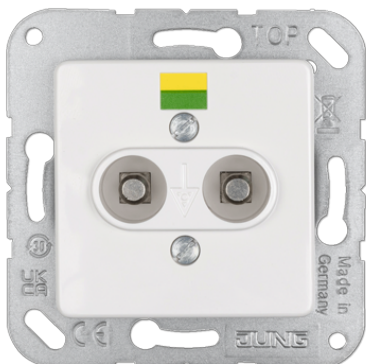

Reference number

165-2 WW

Potential equalisation socket

(with supporting frame, screw fixing only)
with 2 one-pole built-in male sockets according to DIN 42801, for wires up to 6 mm²

Right angle plug

for potential equalisation socket
ref.-no.: 65 WIS

50 x 50 system (screw fixing)

For design ranges:

AS 500 / A 500 / A creation / A plus: with intermediate frame no.: A 590 Z..

CD 500 / CD plus: with intermediate frame no.: ..590 Z.. or hinged lid no.: CD 590 KL..

CD universal: with hinged lid .: CD 590 BFKL..

LS 990 / LS plus: with intermediate frame no.: LS 961 Z.. or hinged lid no.: LS 990 KL..

Aluminium: with hinged lid no.: AL 2990 KL

Stainless Steel: with hinged lid no.: ES 2990 KL

Anthracite: with hinged lid no.: AL 2990 KL AN

Chrome: with hinged lid no.: GCR 2990 KL

Gold: with hinged lid no.: GO 2990 KL

Gold 24 carat: with hinged lid no.: LS 990 KL GGO

Notice!

Installation only by persons with relevant electrical knowledge and experience!*)

Use only with original JUNG product components approved for this article.

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

Please contact a skilled electrician!

***) Required technical knowledge for installation:**

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

Thermoplastic (breakproof) high-gloss

Colour:

white

Material:

thermoplastic