


Product data sheet

Centre plate for modular jack sockets

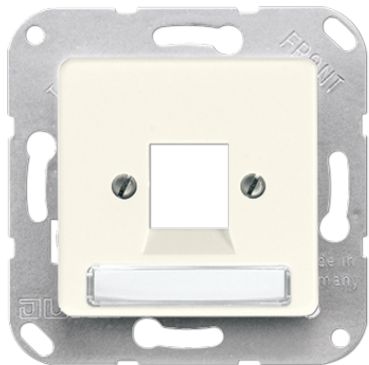

Reference number

169-15 NWE

Centre plate (screw fixing) with inscription field 6 x 37 mm

(with supporting frame, screw fixing only)
for modular jack sockets

TE Connectivity (Tyco Electronics / AMP NETCONNECT)

for cable Ø max. 10 mm:

EMT-jack, Cat. 5e, 180° ref.-no. 0-0188650-5

EMT-jack, Cat. 5e, 90° ref.-no. 0-0188650-6

for cable Ø max. 6.5 mm:

EMT-jack, Cat. 5e, 180° ref.-no. 0-0338038-1

EMT-jack, Cat. 5e, 90° ref.-no. 0-0338038-2

Toolless Jack, Cat. 3 unshielded: ref.-no. 0-1116603-x

Toolless Jack, Cat. 5e unshielded: ref.-no. 0-1116604-x,

Toolless Jack, Cat. 5e shielded: ref.-no. 0-1339015-1

Toolless Jack, Cat. 6 unshielded: ref.-no. 0-1116605-x,

Toolless Jack, Cat. 6 shielded: ref.-no. 0-1339016-1

MTRJ-LWL jack: ref.-no. 1278414-1

for 1 socket

Spare part:

Transparent cover with paper inlay ref.-no.: CD 20 NA

50 x 50 system (screw fixing)

For design ranges:

AS 500 / A 500 / A creation / A plus: with intermediate frame no.: A 590 Z..

CD 500 / CD plus: with intermediate frame no.: ..590 Z.. or hinged lid no.: CD 590 KL..

CD universal: with hinged lid .: CD 590 BFKL..

LS 990 / LS plus: with intermediate frame no.: LS 961 Z.. or hinged lid no.: LS 990 KL..

Aluminium: with hinged lid no.: AL 2990 KL

Stainless Steel: with hinged lid no.: ES 2990 KL

Anthracite: with hinged lid no.: AL 2990 KL AN

Chrome: with hinged lid no.: GCR 2990 KL

Gold: with hinged lid no.: GO 2990 KL

Gold 24 carat: with hinged lid no.: LS 990 KL GGO

Inscription fields may be customised using our GRAPHIC TOOL (jung.group/gt).

Thermoplastic (breakproof) high-gloss

Colour:

ivory

Material:

thermoplastic