


Product data sheet

Rotary blind switch (insert), 2-pole

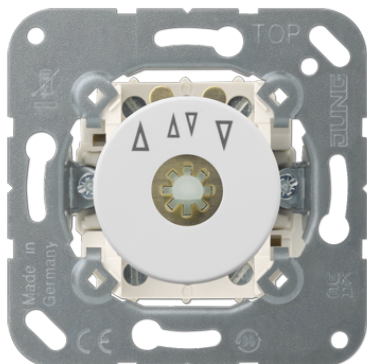

Reference number

1234.20 WW

Rotary blind switch 10 A / 250 V ~ (insert)

with screw terminals for rigid and flexible wires up to 2.5 mm²

Can be converted into rotary push-button by means of locking piece (included).

A pre-travel prevents a quick change of direction.

Can also be used as pole changer (see wiring diagram in data sheet).

Spare scale disc

for ref.-no. 1234.10 and 1234.20: SKS 1234.10

Spare locking piece

ref.-no.: 34.10

Centre plates:

AS / A ranges: ref.-no. .. 1541 ..

CD range: ref.-no. CD 1541 ..

LS range: ref.-no. LS 1941 .., .. 1941 ..

Notice!

Installation only by persons with relevant electrical knowledge and experience!*)

Use only with original JUNG product components approved for this article.

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

Please contact a skilled electrician!

*) Required technical knowledge for installation:

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

Scale disc white

Version:

2-pole (2 motors)