


Product data sheet

2-gang multi push-button (insert)

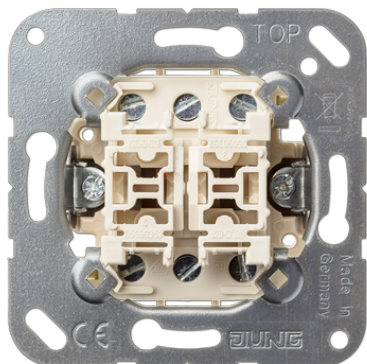

Reference number

532-4 U

2-gang multi push-button 10 A / 250 V ~ (insert)

with screw terminals for rigid and flexible wires up to 2.5 mm²

Especially designed as controller for wirings with relays, e.g. in combination with relay station ref.-no. RS 8 REGHE.

No electrical/mechanical interlocking.

Only recommended for CD and LS ranges (except metal versions).

Notice!

Installation only by persons with relevant electrical knowledge and experience!*)

Use only with original JUNG product components approved for this article.

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

Please contact a skilled electrician!

*) Required technical knowledge for installation:

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

Version:

2 x 1-pole, 2-way push-button with 4 floating 1-way NO contacts, rocker in neutral position