


# Product data sheet

## SCHUKO® socket with LED floor pilot light

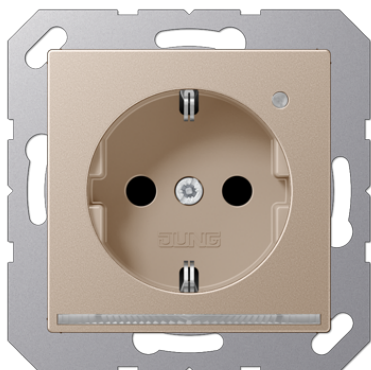

### Reference number

A 1520-O CH LNW

**SCHUKO® socket 16 A / 250 V ~**

**with LED floor pilot light**  
**with integrated brightness sensor**  
**with enhanced contact protection / shutter (Safety Plus)**  
**with screwless terminals for rigid wires up to 2.5 mm<sup>2</sup>**

installation into deep flush box  
 with white LEDs (colour temperature 3500 K)  
 power consumption stand-by / ON: 0.3 / 0.5 W  
 Supporting frame, claws and claw screws are integrated into the earth protection.

### Notice!

**Installation only by persons with relevant electrical knowledge and experience!\*)**

**Use only with original JUNG product components approved for this article.**

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

**Please contact a skilled electrician!**

**\*) Required technical knowledge for installation:**

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

**Thermoplastic (breakproof) lacquered**

**Colour:**  
 champagne

**Material:**  
 thermoplastic lacquered

**P** Individual colour printing possible