


# Product data sheet

## eNet radio transmitter module 2-gang

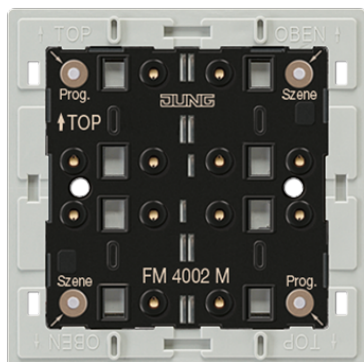

### Reference number

FM 4002 M

### eNet radio transmitter module 2-gang

for cover kit 2-gang, ref.-no.: .. 402 TSA ..

for cover 2-gang with symbols, ref.-no.: .. 402 TSAP ..

Adapter frames are included in delivery:

ref.-no. LS 4 AR for LS range (pre-mounted) and ref.-no. CD 4 AR for CD range.

AS / A ranges without adapter frame.

including mounting plate, adhesive film and fastening screw

Cannot be combined with frames in FLAT DESIGN.

### Intended use

- Radio sensor for transmission of switching, dimming, blind movement and scene commands
- Operation with radio actuators from the eNet system
- Mounting on flush box with dimensions according to DIN 49073, screw fixing on walls or adhesive fixing on smooth, even surfaces (glass)

### Product characteristics

- Each button is "divided" into an upper and lower half belonging to a channel
- Display of the actuator status for status poll by a green LED per channel
- Display of the transmission status by a red LED
- Switch-on brightness of dimmer actuators can be saved
- Battery-powered device
- Signalling of transmission errors can be switched off

### Can be set with eNet server:

- Scene All On
- Operating locks

### Supplementary functions with eNet server:

- Fully-encrypted radio transmission (AES-CCM) from eNet server software version 2.0
- Update of the device software

### Technical data

|                                   |                                 |
|-----------------------------------|---------------------------------|
| Rated voltage:                    | DC 3 V                          |
| Battery type:                     | 1 x lithium CR 2450N (included) |
| Ambient temperature:              | -5 ... +45 °C                   |
| Radio frequency:                  | 868.0 ... 868.6 MHz             |
| Transmitting power:               | max. 20 mW                      |
| Transmission range in free field: | typical 100 m                   |
| Receiver category:                | 2                               |

