


Product data sheet

SCHUKO® socket with USB charger

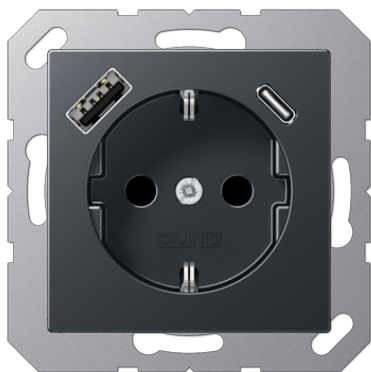

Reference number

A 1520-15 CA ANM

SCHUKO® socket with USB charger

with enhanced contact protection / shutter (Safety Plus)
with 1 USB port type A and 1 USB port type C
with screwless terminals for rigid and untreated flexible wires up to 2.5 mm²

Installation in flush box with dimensions according to DIN 49073
depth of flush box (inner dimension): min. 57 mm

Accessories:

Frame 28 mm structure height ref.-no.: A 558.. HBF ..

Plastic design cover made from 95% recycled material in accordance with DIN EN ISO 14021 - sustainable, conserves resources

Technical data

Rated voltage:	AC 220 ... 250 V ~
Mains frequency:	50/60 Hz
Rated current:	16 A
Output voltage USB:	DC 5 V
Output current USB (total):	3 A
Stand-by power:	≤ 25 mW
Ambient temperature:	+5 ... +35 °C
Storage/transport temperature:	-20 ... +70 °C
Connection mode:	screwless terminals
single wire:	1.5 ... 2.5 mm ²
stranded without ferrule:	1.5 ... 2.5 mm ²

matt lacquered

Colour:
matt anthracite

Material:
thermoplastic lacquered



Individual colour printing possible