


# Product data sheet

## SCHUKO® socket with USB charger

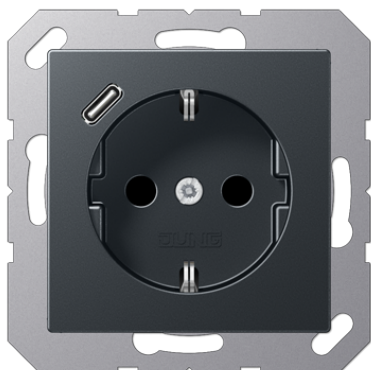

### Reference number

A 1520-18 C ANM

### SCHUKO® socket with USB charger

with enhanced contact protection / shutter (Safety Plus)  
with 1 USB port type C  
with quick charge function (JUNG Quick Charge®)  
with screwless terminals for rigid and untreated flexible wires up to 2.5 mm<sup>2</sup>

Installation in flush box with dimensions according to DIN 49073  
depth of flush box (inner dimension): min. 57 mm

### Accessories:

Frame 28 mm structure height ref.-no.: A 558.. HBF ..

Plastic design cover made from 95% recycled material in accordance with DIN EN ISO 14021 - sustainable, conserves resources

### Technical data

|                                |                             |
|--------------------------------|-----------------------------|
| Rated voltage:                 | AC 220 ... 250 V ~          |
| Mains frequency:               | 50/60 Hz                    |
| Rated current:                 | 16 A                        |
| Output voltage USB:            | DC 9 V / DC 5 V             |
| Output current USB:            | 2 A / 3 A                   |
| Stand-by power:                | ≤ 25 mW                     |
| Ambient temperature:           | +5 ... +35 °C               |
| Storage/transport temperature: | -20 ... +70 °C              |
| Connection mode:               | screwless terminals         |
| single wire:                   | 1.5 ... 2.5 mm <sup>2</sup> |
| stranded without ferrule:      | 1.5 ... 2.5 mm <sup>2</sup> |



**matt lacquered**

**Colour:**  
matt anthracite

**Material:**  
thermoplastic lacquered

**P** Individual colour printing possible