


# Product data sheet

SCHUKO® socket with hinged lid and pilot light

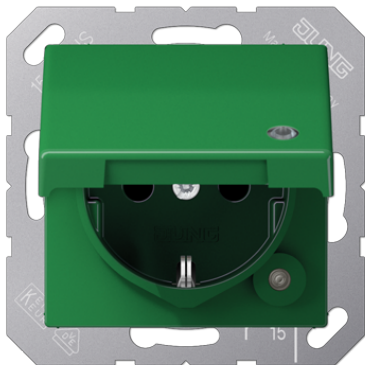

## Reference number

A 1520 BFKLKO GN

**SCHUKO® socket 16 A / 250 V ~**

with hinged lid (with spring)  
with pilot light (green LED) ref.-no.: 193-LED GN  
with enhanced contact protection / shutter (Safety Plus)  
with screwless terminals for rigid and untreated flexible wires up to 2.5 mm<sup>2</sup>

without claws: ref.-no. with additional "N", e.g.: ..1520 N..  
Supporting frame, claws and claw screws are integrated into the earth protection.

Spare pilot light exchangeable from the front without disconnecting the mains

### Notice!

**Installation only by persons with relevant electrical knowledge and experience!\*)**

**Use only with original JUNG product components approved for this article.**

By inappropriate installation you endanger

- your own life,
- the life of the user of the electrical appliance.

By inappropriate installation you risk a high loss by damage, e.g. risk by fire.

You assume personal liability in cause of injury to persons or damage of appliances.

**Please contact a skilled electrician!**

**\*) Required technical knowledge for installation:**

For installation, especially the following technical knowledge is required:

- the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
- select adequate tools, measuring devices and personal protective equipment
- evaluate measuring results
- selection of the electrical installation material to secure switch-off conditions
- IP protection levels
- installation of the electrical installation material
- type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)

**Thermoplastic (breakproof) high-gloss**

**Colour:**

green

**Material:**

thermoplastic

**IP** Degree of protection IP44 is ensured with sealing gasket ref.-no. 551 WU and "IP44 frame" of the respective design range.

**P** Individual colour printing possible