


Product data sheet

Universal push-button module 2-gang

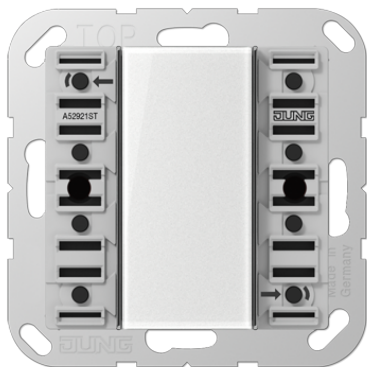

Reference number

A 5292 1ST

KNX universal push-button module 2-gang

including transparent cover ref.-no.: A 50 NA

for cover kit 2-gang, ref.-no.: A 502 TSA ..

can be extended by means of a push-button extension module, ref.-no.: A 509.. TSEM

ETS product family: Push-button

Product type: 2-gang push-button

Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- KNX medium: TP 256
- Push-button functions switching, dimming, controlling blinds, value transmitter, calling up light scenes etc.
- One or two functions per button
- To be completed with cover kit
- Inscription field can be illuminated
- One status LED per button, red, green or blue, adjustable
- One operation LED as orientation light and to indicate the programming status – red, green or blue adjustable
- Brightness of status LEDs, operation LED and inscription field adjustable; switchable while in operation, e.g. during the night
- Measurement of room temperature
- Extension unit for room temperature controller
- Disabling function: Disabling or change function mode of single or all button functions
- Alarm function, optional acknowledge by pressing any button
- Energy saving mode
- Integrated bus coupling unit
- Connection for a push-button extension module, 1-4 gang
- Including transparent cover kit for operation on construction site without design covers
- KNX Data Secure compatible with ETS 5.7.7 or ETS 6.3.0 or higher
- Can be updated with the ETS Service App

Spare part:

Transparent cover ref.-no.: A 50 NA

Accessories:

Neutral cover ref.-no.: A 50 NA W, A 50 NA WW, A 50 NA SW, A 50 NA AL, A 50 NA CH, A 50 NA MO, A 50 NA WWM, A 50 NA SWM, A 50 NA ANM

Cover, suitable for backlighting ref.-no.: A 50 NA TX SW-L

Accessories:

external sensor ref.-no.: FF NTC