


Product data sheet

RCD (residual current device) 30 mA

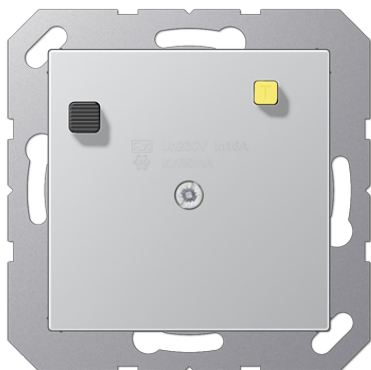

Reference number

A 5530 FIB AL

RCD (residual current device) 16 A / 250 V ~

according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11)

Rated residual current: 30 mA

with screwless terminals for rigid wires up to 2.5 mm²

not suitable for installation in surface caps

suitable for cables with 2 or 3 conductors

Installation in a 60 mm wall box (deep box recommended). Stationary protective device with voltage-independent function. The sockets connected to the output terminals are protected in accordance with DIN VDE 0100-410. However, the electrical installation up to the RCD is not protected!

Technical data

Rated voltage: AC 230 V ~

Mains frequency: 50/60 Hz

Rated current: 16 A

Rated residual current: 30 mA

Ambient temperature: -25 ... +40 °C

Thermoplastic (breakproof) lacquered

Colour:

aluminium

Material:

thermoplastic lacquered