


# Product data sheet

RCD (residual current device) 30 mA

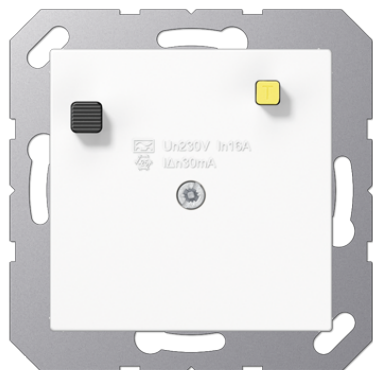

## Reference number

A 5530 FIB WW

**RCD (residual current device) 16 A / 250 V ~**

according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11)

**Rated residual current: 30 mA**

with screwless terminals for rigid wires up to 2.5 mm<sup>2</sup>

not suitable for installation in surface caps

suitable for cables with 2 or 3 conductors

Installation in a 60 mm wall box (deep box recommended). Stationary protective device with voltage-independent function. The sockets connected to the output terminals are protected in accordance with DIN VDE 0100-410. However, the electrical installation up to the RCD is not protected!

## Technical data

|                         |                |
|-------------------------|----------------|
| Rated voltage:          | AC 230 V ~     |
| Mains frequency:        | 50/60 Hz       |
| Rated current:          | 16 A           |
| Rated residual current: | 30 mA          |
| Ambient temperature:    | -25 ... +40 °C |

**Thermoplastic (breakproof) high-gloss**

**Colour:**

white

**Material:**

thermoplastic