


Product data sheet

eNet radio transmitter module 4-gang

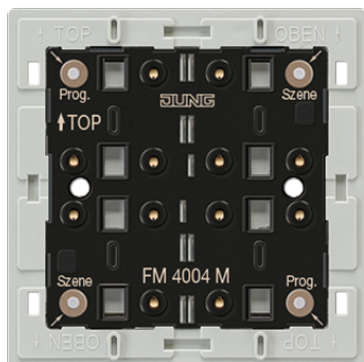

Reference number

FM 4004 M

eNet radio transmitter module 4-gang

for cover kit 4-gang, ref.-no.: .. 404 TSA ..

for cover 4-gang with symbols, ref.-no.: .. 404 TSAP ..

Adapter frames are included in delivery:

ref.-no. LS 4 AR for LS range (pre-mounted) and ref.-no. CD 4 AR for CD range.

AS / A ranges without adapter frame.

including mounting plate, adhesive film and fastening screw

Cannot be combined with frames in FLAT DESIGN.

Intended use

- Radio sensor for transmission of switching, dimming, blind movement and scene commands
- Operation with radio actuators from the eNet system
- Mounting on flush box with dimensions according to DIN 49073, screw fixing on walls or adhesive fixing on smooth, even surfaces (glass)

Product characteristics

- Each button is "divided" into an upper and lower half belonging to a channel
- Display of the actuator status for status poll by a green LED per channel
- Display of the transmission status by a red LED
- Switch-on brightness of dimmer actuators can be saved
- Battery-powered device
- Signalling of transmission errors can be switched off

Can be set with eNet server:

- Scene All On
- Operating locks

Supplementary functions with eNet server:

- Fully-encrypted radio transmission (AES-CCM) from eNet server software version 2.0
- Update of the device software

Technical data

Rated voltage:	DC 3 V
Battery type:	1 x lithium CR 2450N (included)
Ambient temperature:	-5 ... +45 °C
Radio frequency:	868.0 ... 868.6 MHz
Transmitting power:	max. 20 mW
Transmission range in free field:	typical 100 m
Receiver category:	2

