


Product data sheet

Magnet contact

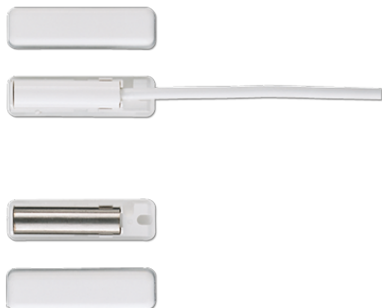

Reference number

FUS 4410 WW

Magnet contact

A sealed tubular glass envelope protects the magnet contact (reed contact) against dust and water.

The reed contact is actuated by means of a permanent magnet.

For installation in steel profiles (magnetic material) only block reed contacts can be used.

Included in delivery:

2 surface-mounted housings, 2 caps,

3 spacers 2 mm

1 spacer 6 mm

To be integrated into the signalling system of the Smart Panels by the KNX system via binary inputs / push-button interfaces.

Technical data

Contact type:	1-pole, 1-way NO contact
Switching voltage:	max. 100 V DC
Switching current:	max. 0.5 A
Contact rating:	max. 10 W or 10 VA
Transition resistance:	0.15 Ω
Permissible operating voltage:	max. 40 V
Connection cable:	LIYY 2 x 0.14 mm, $\varnothing$ 3.2 mm (length 3 m)
Dimensions:	contact = 32 mm x $\varnothing$ 8 mm magnet = 30 mm x $\varnothing$ 6 mm AlNiCo 5 housing (LxWxH) = 54 x 13 x 13 mm

Colour:

white

Version:

similar RAL 9016