


Product data sheet

Push-button extension module

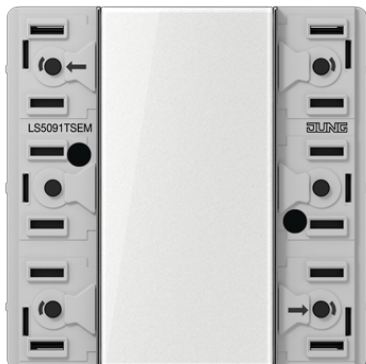

Reference number

LS 5091 TSEM

Push-button extension module

including transparent cover ref.-no.: LS 50 NA
for the extension of up to 4 additional push-buttons for the devices:

- Universal push-button module (ref.-no. LS 529.. 1ST)
- Room temperature controller module (ref.-no. LS 5178 TSM)
- Room controller display module (ref.-no. LS 529.. D 1ST)

Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- One or two functions per button
- To be completed with cover kit
- Inscription field can be illuminated
- One status LED per button, red, green or blue, adjustable
- One operation LED as orientation light and to indicate the programming status – red, green or blue adjustable
- Brightness of status LEDs, operation LED and inscription field adjustable; switchable while in operation, e.g. during the night
- Measurement of room temperature
- Extension unit for room temperature controller
- Disabling function: Disabling or change function mode of single or all button functions
- Alarm function, optional acknowledge by pressing any button
- Energy saving mode
- Including transparent cover kit for operation on construction site without design covers

Spare part:

transparent cover ref.-no.: LS 50 NA

Accessories:

Neutral cover ref.-no.: LS 50 NA W, LS 50 NA WW, LS 50 NA LG, LS 50 NA SW, LS 50 NA WWM, LS 50 NA SWM, AL 50 NA(-L), ES 50 NA(-L), AL 50 NA AN(-L), AL 50 NA D(-L), ME 50 NA C(-L), ME 50 NA AT(-L)
Cover, suitable for backlighting ref.-no.: LS 50 NA TX SW-L

Accessories:

external sensor ref.-no.: FF NTC

Technical data

Cable length: max. 30 m
Cable type: J-Y(St)Y 2 x 2 x 0.8 mm

Version:

1-gang