


Product data sheet

SAT-TV-FM outlet, terminated outlet

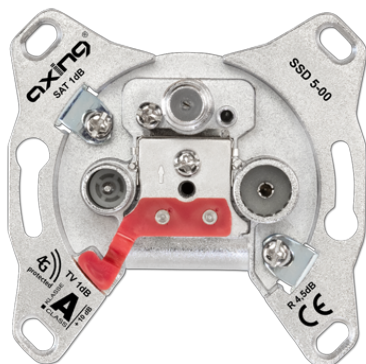

Reference number

SSD 5-00

SAT-TV-FM outlet, terminated outlet

- CATV / SAT
- Suitable for return channel 5 ... 65 Mhz
- Extended connector F female
- Vodafone listed

Terminated outlets are used to terminate stub lines coming from the tap/splitter (broadband network) or multiswitch/LNB (star structure).

Covers:

AS / A ranges: ref.-no.: A 561 PLSAT ..

CD range: ref.-no.: CD 561 SAT ..

LS range: ref.-no.: ..990 SAT ..

Technical data

Shielding effectiveness according to EN 50083-2:	class A (+10 dB)
Tap method:	filter circuit / directional coupler technology
Trunk	
Frequency range, input:	5 ... 2200 MHz
Diameter inner conductor:	0.63 ... 1.13 mm
Outer diameter cable:	4.7 ... 7.35 mm
TV connection	
Connection type:	IEC male
Frequency range:	109 ... 862 MHz / 5 ... 65 MHz
Connection attenuation:	≤1.5 dB
Radio connection	
Connection type:	IEC female
Frequency range:	87.5 ... 108 MHz
Connection attenuation:	≤4.5 dB
SAT connection	
Connection type:	F female
Frequency range:	950 ... 2200 MHz
Connection attenuation:	≤1.5 dB
DC power pass to trunk:	yes
Dimensions (W x H x D):	68 x 68 x 39 mm