


Product data sheet

KNX push-button extension 2-gang

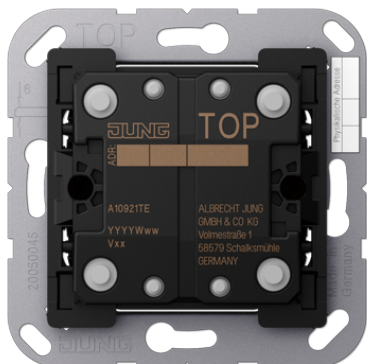

Reference number

A 1092 1TE

KNX push-button extension 2-gang

for rockers ref.-no. .. 102 .. of the AS and A ranges

Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- Operating concept (rocker or button) adjustable for each operating area
- Button evaluation (single-area operation or dual-area operation) adjustable
- One or two functions per operating area
- Without status LED
- Without bus coupling unit
- Connection to push-button universal

Accessories:

external sensor ref.-no.: FF NTC

Technical data

Ambient conditions

Ambient temperature:	-5 ... +45 °C
Storage/transport temperature:	-25 ... +70 °C